

Pas t t js

Projekts

Lapa 1 / 1

Pas t t ja Nr.

Projekts Nr.


Datums 2009-10-20

Kontakpersona

Poz cija Nr.

Atbild gais

Objekta vieta

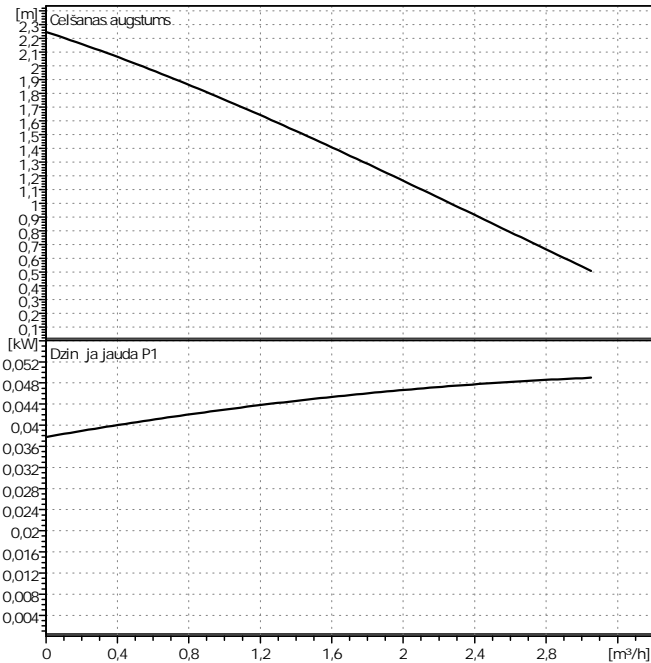

Nepieciešamie parametri

Raž ba	0	m <sup>3</sup> /h
Celšanas augstums	0	m
Š idrums	dens, t rs	
Š idruma temperat ra	20	°C
Bl vums	0,9983	kg/dm <sup>3</sup>
Kinem tisk viskozit te	1,005	mm <sup>2</sup> /s
Tvaiku spiediens	0,02337	bar

S k a dati

Ražot js	WILO	
Tips	Star-Z 25/2 CircoStar 1~	
S k a tips	S knis	
Spiediena klase	PN10	
Min. š idruma temperat ra	5	°C
Max. š idruma temperat ra	110	°C

Hidrauliskie dati (noslodzes punkts)

Raž ba		m <sup>3</sup> /h
Celšanas augstums		m
Dzin ja jauda P1		kW
trums	2300	1/min

Minim ls ies kšanas spiediens

Temperat ra	50	95	110			°C
Minim ls ies kšanas spiediens	0,5	3	10			m

Materi li / V rpstas bl vsl gs

Korpuss	G-CuSn 5
V rpsta	Keramikas
Darba rats	PPO, Noryl
Gult i	Graf ts

Izm ri

	mm			
a1	34	10	180	
b1	100	11	97	
b2	92,5	12	130	
b3	54	13	70	
b4	73	14	79	

S cpuse	Rp 1 1/2	/ PN 10
Spiedpuse	Rp 1 1/2	/ PN 10
Svars	2,4	kg

Motora dati

S k a jauda P2	0,012	kW
Dzin ja jauda P1	0,049	kW
Nomin ls trums	2300	1/min
Pat r tais spriegums	1~230 V, 50 Hz	
Maksim ls ener ijas pat rtais	0,25	A
Aizsardz bas klase	IP 44	
Pie aujam s sprieguma sv rst bas	+/- 10%	

Standarta izpild juma artikula numurs 4029062

