



High efficiency pumps

WITA HE go.future 40 | 60 LED

Product specials

- 5 years warranty
- Night mode
- Display of the current power consumption
- Anti-block function
- also available with PWM module or as 0 - 10 V version




Technical Data

Max. pump lift	4,0 m 6,0 m
Max. flow rate	2.800 l/h 3.600 l/h
Power consumption	3 - 23 W 3 - 42 W
Supply voltage	1 x 230V, 50 Hz
Motor protection	no external motor protection required
Ip rating	IP 42
Ambient temperature	0 °C to +40 °C
Media temperature	+5 °C to +110 °C
Systeme pressure	max. 1,0 MPa
Connection size	DN 15, DN 20, DN 25, DN 32
Installation lengths	110 mm, 130 mm, 180 mm
Material pump housing	130 mm, 180 mm grey cast iron cataphoresis coated; 110 mm in brass
EEL	≤ 0,20 4 constant characteristics, 4 proportional characteristics, 4 proportional power characteristics with PWM or 0-10 V entry
Special equipment	Smart adapt function Night mode Version with and without power display as light version available



Characteristic WITA HE go.future 40 LED

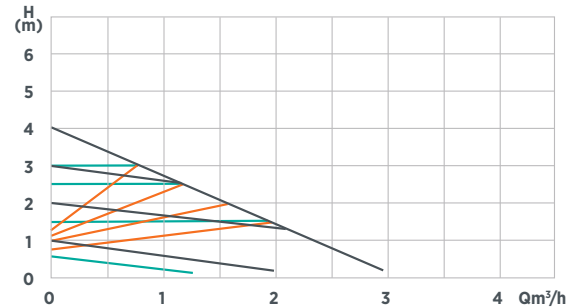

Characteristic WITA HE go.future 60 LED

