

Data sheet: HiMulti 3 C 1-24 P

Hydraulic data

Maximum operating pressure P_N	8 bar
Pressure port	G 1
Min. fluid temperature T_{min}	0 °C
Max. fluid temperature T_{max}	40 °C
Min. ambient temperature T_{min}	-15 °C
Max. ambient temperature T_{max}	40 °C

Materials

Shaft	Stainless steel
Shaft seal	BVPFF
Gasket material	EPDM
Stage chamber material	PPE/PS-GF30

Information for order placements

Brand	Wilo
Product description	HiMulti 3 C 1-24 P
EAN number	4048482503554
Article number	2543599
Net weight, approx. m	13 kg
Gross weight, approx. m	15.5 kg
Length with packaging	480 mm
Height with packaging	500 mm
Width with packaging	300 mm
Packaging property	Sales packaging
Packaging type	Cardboard box
Minimum order quantity	1

Motor data


Mains connection	1~230 V, 50 Hz
Rated power P_2	0.40 kW
Rated current I_N	3.00 A
Rated speed n	2900 1/min
Insulation class	F
Protection class	X4

Installation dimensions

Pipe connection on the suction side DN_s	G 1
Pipe connection on the pressure side DN_d	G 1


Dimensions and dimensions drawings: HiMulti 3 C 1-24 P

HiMulti 3 C 1-24 P

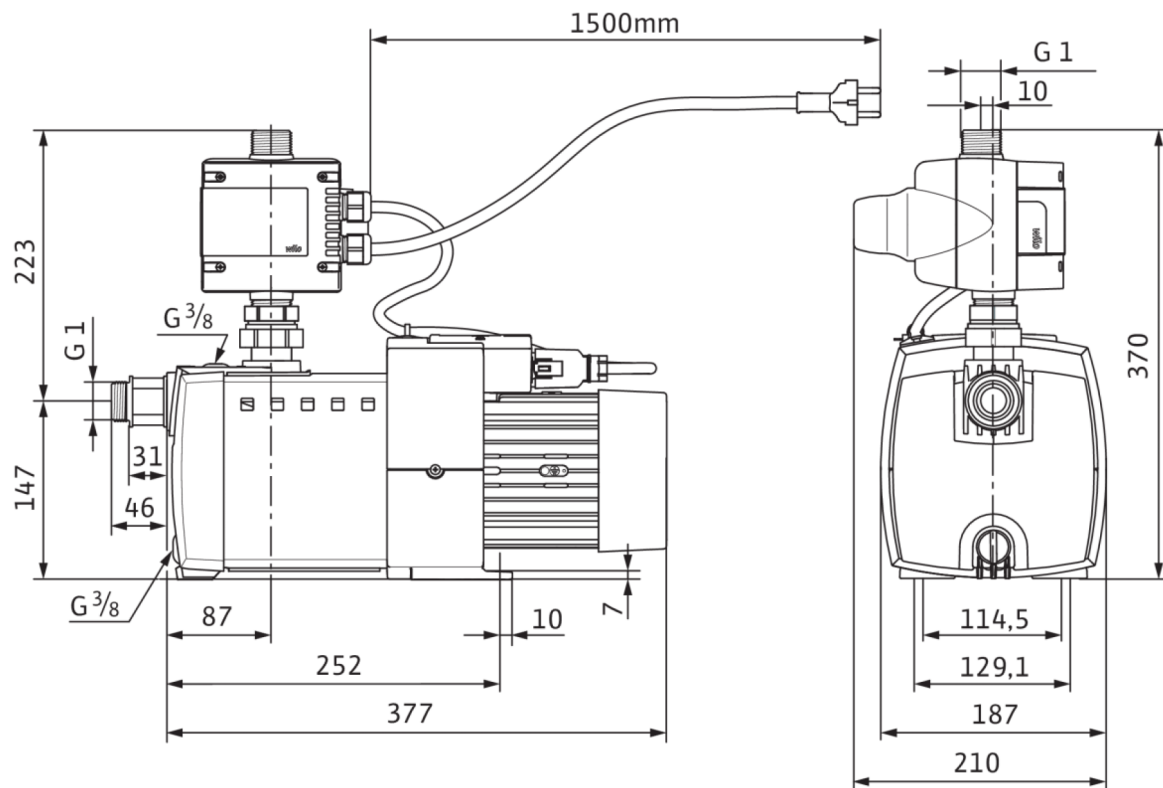

Pump curves: HiMulti 3 C 1-24 P

Wilo-HiMulti 3C 23-25 (P)

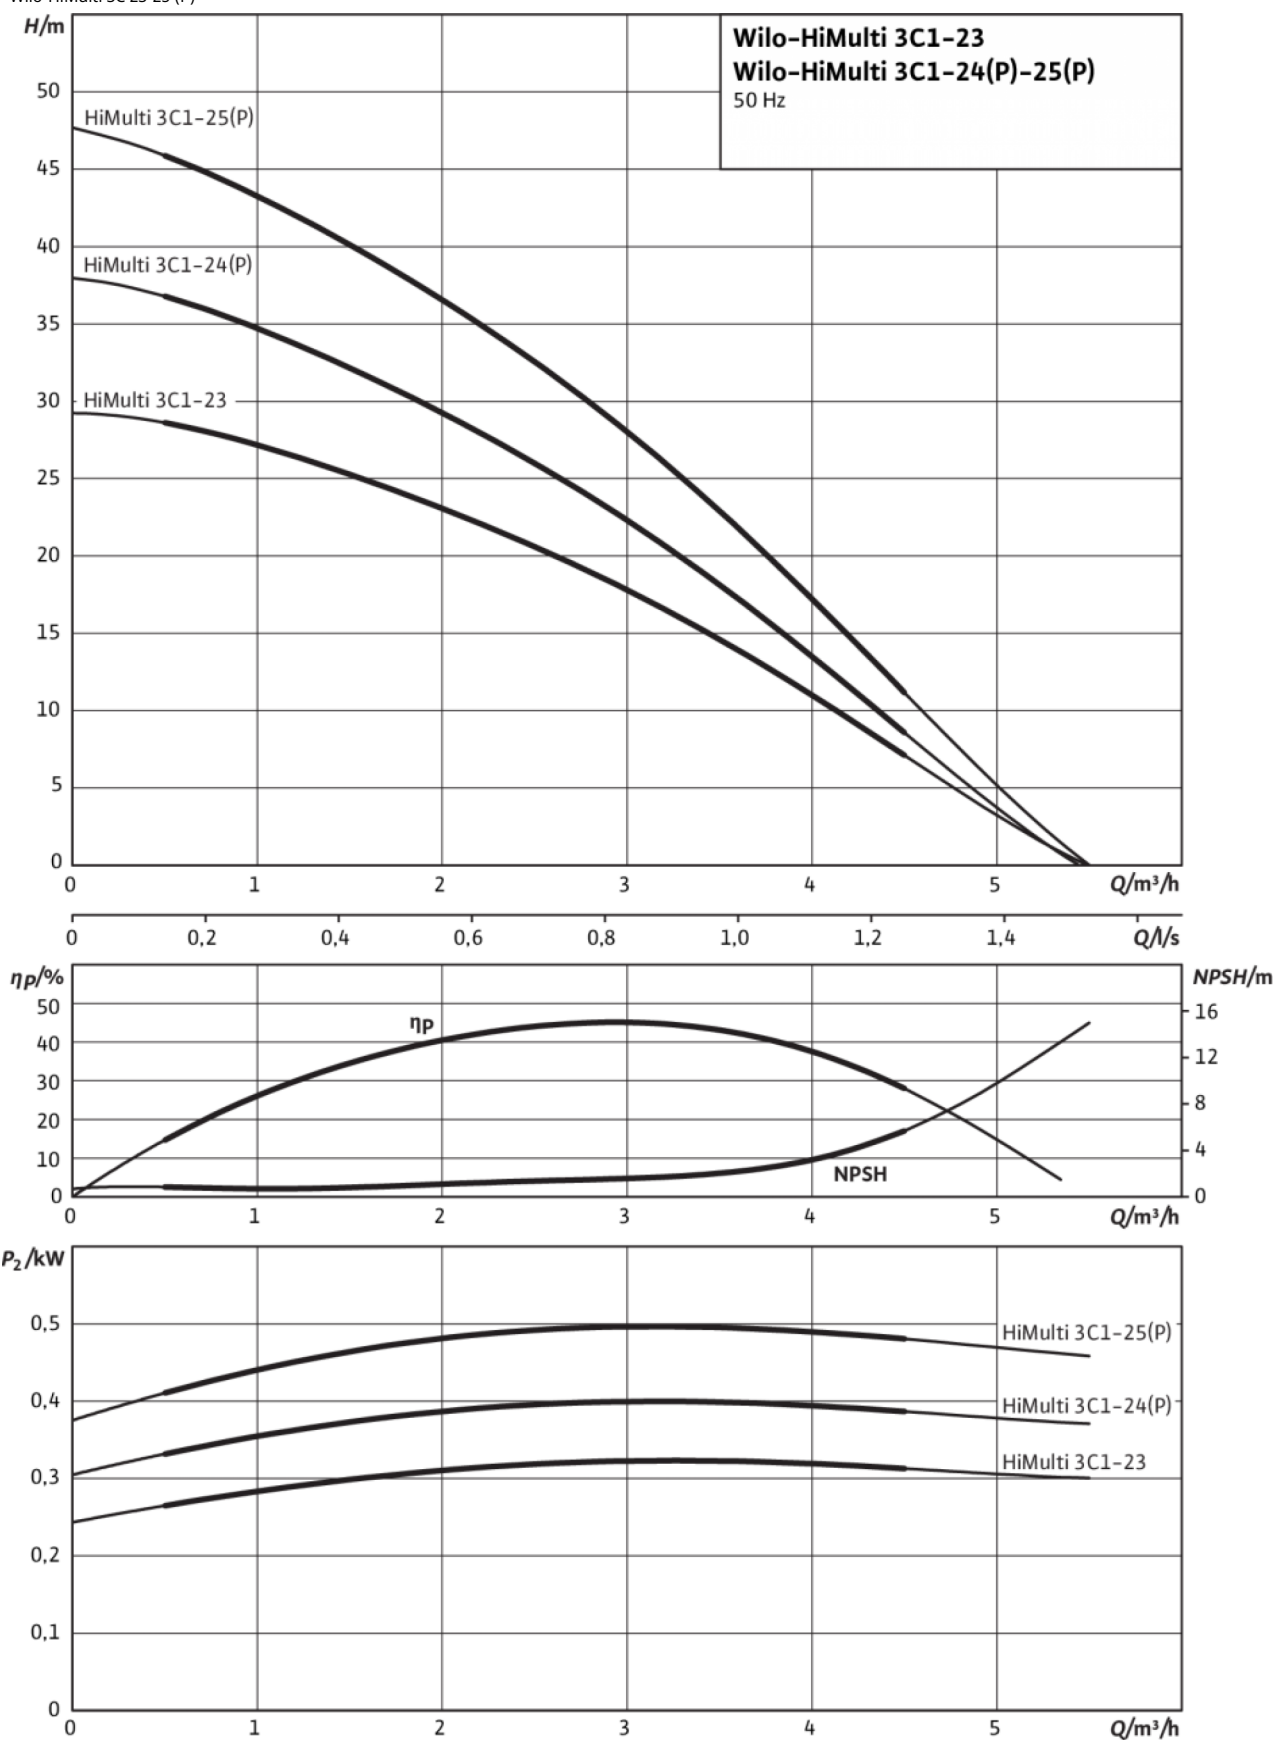

Ordering information: HiMulti 3 C 1-24 P

Brand	Wilo
Product description	HiMulti 3 C 1-24 P
EAN number	4048482503554
Article number	2543599
Gross weight, approx. <i>m</i>	15.5 kg
Net weight, approx. <i>m</i>	13 kg
Overall length <i>L</i>	377.0 mm
Height without packaging <i>H</i>	370 mm
Colour	green/silver
Packaging property	Sales packaging
Packaging type	Cardboard box
Number per layer	6
Width without packaging <i>B</i>	210.0 mm
Minimum order quantity	1
Pieces per pallet	12
Date of sales availability	2016-03-01
Date of introduction	2016-03-01