

WITA go.future Z

Product specials

- 5 year guarantee
- Anti-lock function
- low power consumption 3.0 - 6.5 W
- 3 pump curves
- compact design
- ceramic bearings




Technical data

Maximum delivery height	1.0 m
Maximum flow	600 l / h
Power consumption	3.0 - 6.5 W.
Control	3 constant characteristics
Additional	anti-lock function
Supply voltage	1 x 230V, 50 Hz
Motor protection	no external motor protection required
Protection class	IP 42
Ambient temperature	0 ° C to +40 ° C
Media temperature	+5 ° C to 65 ° C
Temperature class	TF 60 according to DIN EN 60335-2-51
System pressure max.	10 bar
Connection sizes	DN 15
Material pump	housing brass



WITA go.future Z

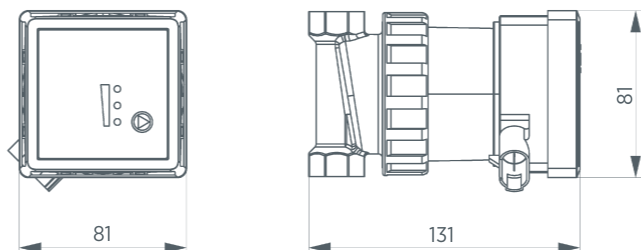

Characteristic WITA go.future Z

