

WITA Delta HE 100 F | HE 120 F

Product Specials


- 5 years warranty
- Night mode/minimum operating level
- LCD display of power consumption
- Venting program
- Anti-lock function
- Also available as PWM or 0-10 V version




Technical Data

Maximum delivery head	10.0 m 12.0 m
Maximum flow rate	9.950 l/h 9.950 l/h
Power consumption	5 - 155 W 5 - 175 W
Regulation	5 constant characteristics, 6 proportional characteristics
Additional function	minimal operating function/manual night mode, automatic night mode, LCD display of power consumption, venting program, anti-lock function
Supply voltage	1 x 230 V, 50 Hz
Motor protection	no external motor protection required
Protection rating	IP 42
Ambient temperature	0 °C to +40 °C
Temperature of the medium	+5 °C to +110 °C
Temperature class	TF 110 according to EN 60335-2-51
Maximum system pressure	10 bar
Connection sizes	DN 40, DN 50
Installation lengths	DN 40 / 220 mm, DN 50 / 240 mm
Pump housing material	variant in grey cast iron, cataphoretic coated
Weight inclusive insulation	DN 40 / 7.0 kg, DN 50 / 8.0 kg
EEI	≤ 0.23
Special equipment	also available as PWM or 0-10 V version

WITA Delta
HE 100 F40

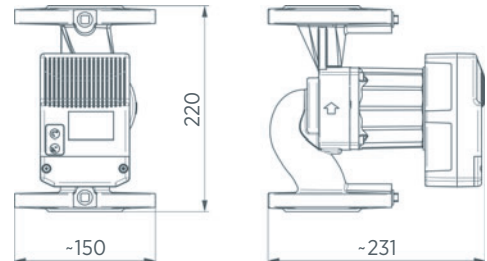

WITA Delta
HE 120 F50

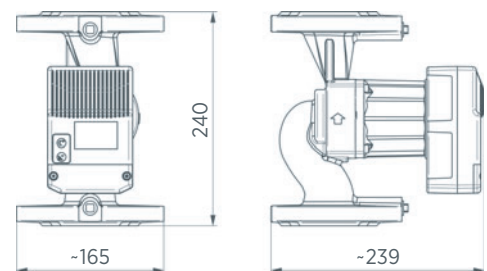

Characteristic WITA Delta HE 100 F



Characteristic WITA Delta HE 120 F

