

Braukmann

V5007

Kombi-PICV

Pressure Independent Balancing and Control Valve

Application

The V5007 is a Pressure Independent Control Valve (PICV). It combines a flow controller and a full stroke, full authority temperature controller in one valve.

Equipped with an actuator Kombi-PICV provides a full stroke modulating temperature control.

It is suitable for use in variable and constant flow systems. They may be used as constant flow limiter in constant flow systems (without an actuator) or as a Pressure Independent Control Valve in variable flow systems.

V5007 is typically used for balancing and temperature control of fan coil units, chilled ceilings and one-pipe heating systems. It is not intended for a potable water control.

Special Features

- Automatic balancing of differential pressure
 - Precise pressure independent flow performance
 - Highest energy saving potential due to efficient energy transfer and minimised pump speed
 - Measuring possibility to find the optimal setpoint for the pump
 - Versions with or without measuring connections available
 - Reduced movements of actuators as pressure fluctuation do not influence the required temperature
 - No complex calculation needed for selection
 - No balancing method needed for commissioning
 - Equal-percentage characteristics when used with modulating actuator
- Wide range of application
 - Sizes DN15 to DN50 cover all popular sizes on Fan Coil Units various versions to support standard flow rates as well as low flow and high flow needs
 - Covers hydronic balancing and temperature control in one valve thus reducing mounting costs
- Easy commissioning
 - Presetting with visual flow scale indicating directly the preset cubic meters per hour
 - Presetting using standard tool (wrench)
 - Can balance a system even if only some parts of a building are in operation
- Maintenance friendly
 - Emergency shut-off function with plastic cap – not for permanent use, maximum 6 bars one side overpressure
- Draining and cleaning by opening of diaphragm area
- Flow measuring possibility for problematic applications (only with versions having measuring connections)
- Dirt resistant – no dead zones in the valves. Continuous flow assures self-cleaning effects. Ability to flush the diaphragm area

Valve Efficiency

	low					high				
Energy efficiency	●	●	●	●	●	●	●	●	●	●
Commissioning effort	●	●	○	○	○	○	○	○	○	○
Calculation effort	●	●	○	○	○	○	○	○	○	○



V5007T(Z/N)10



V5007T(Z/N)20



V5007T(Z/N)10(32/40/50)

Technical Data


Media	
Medium:	Water with max. 50 % glycol according to VDI 2035 (up to 50 % Glycol)
pH-value:	8 - 9.5
Pressure values	
Max. operating pressure:	max. 25 bar for V5007T(Z/N)10... max. 16 bar for V5007T(Z/N)20... variants
Differential pressure range: Δp_{min} Δp_{max}	see table "K _v -values for measurement" 600 kPa (6 bar)
Operating temperatures	
Max. operating temperature medium:	-10 to 120 °C (14 - 248 °F) ¹

Connections/Sizes	
Nominal size:	DN15 - DN50
Specifications	
Flow values:	see table "K _v -values for measurement"
Leakage:	According to Class IV IEC 60534-4 (up to 6 bar differential pressure)
k _{vs} (c _{vs})-value:	see table "K _v -values for measurement"
Pressure accuracy:	+/- 10 % of actual preset value in ideal conditions for presetting higher than 20 % of maximum


1. In case of usage above 90 °C discuss the application with customer care

Construction


V5007T(Z/N)10... variants

Overview	Components	Materials
	1 Hexagon for presetting the valve. Easy presetting by standard tool (SW19)	High performance polymer
	2 Valve housing for internal and external threads (V5007TZ... variant) and internal threads (V5007TN... variant)	Dezincification-resistant brass
	3 Metallic cover with draining connection secured by nut allows PN25	Dezincification-resistant brass
	4 Two SafeCon™ pressure test valves for measuring using venturi effect	Dezincification-resistant brass
Not depicted components:		
Valve insert with diaphragm assembly		High resistant polymer with EPDM diaphragm and stainless steel components
Sealings		EPDM
Presetting parts		High resistant polymer and brass
Inner parts		Brass, stainless steel, high resistant polymer and EPDM
Installation and setup instructions		Paper

V5007T(Z/N)20... variants

Overview	Components	Materials
	1 Hexagon for presetting the valve. Easy presetting by standard tool (SW19)	High performance polymer
	2 Valve housing for internal and external threads (V5007TZ... variant) and internal threads (V5007TN... variant)	Dezincification-resistant brass
	3 PPS cover with stainless c-clip having high rust resistance (allows PN16)	High performance polymer and stainless steel
	Not depicted components:	
	Valve insert with diaphragm assembly	High resistant polymer with EPDM diaphragm and stainless steel components
	Sealings	EPDM
	Presetting parts	High resistant polymer and brass
	Inner parts	Brass, stainless steel, high resistant polymer and EPDM
	Installation and setup instructions	Paper

V5007T(Z/N)10(32/40/50)... variants

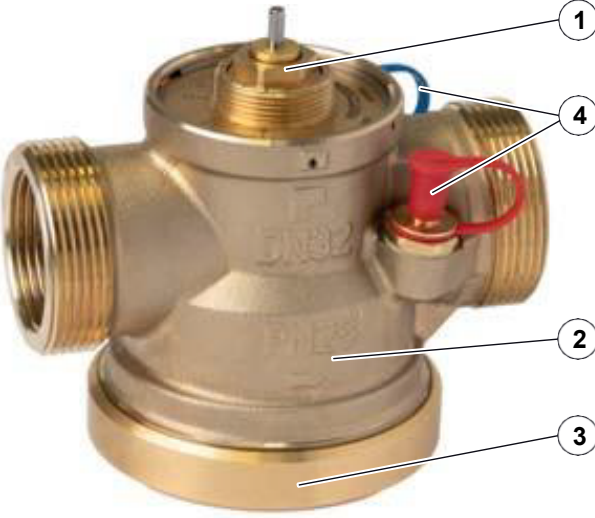Overview	Components	Materials
	1 Hexagon for presetting the valve. Easy presetting by standard tool (SW19)	Dezincification-resistant brass
	2 Valve housing for internal and external threads (V5007TZ... variant) and internal threads (V5007TN... variant)	Dezincification-resistant brass
	3 Metallic cover with draining connection secured by nut allows PN25	Dezincification-resistant brass
	4 Two SafeCon™ pressure test valves for measuring using venturi effect	Dezincification-resistant brass
	Not depicted components:	
	Valve insert with diaphragm assembly	EPDM diaphragm and stainless steel components
	Sealings	EPDM
	Presetting parts	Stainless steel
	Inner parts	Brass, stainless steel and EPDM
	Installation and setup instructions	Paper

Method of Operation

The V5007 combines the functionality of a dynamic balancing valve and a control valve in one product.

The dynamic balancing function maintains a constant differential pressure over the control valve.

The control valve regulates the flow by means of a variable orifice which is controlled by the actuator (with the equal percentage characteristics of the control).

The constant differential pressure across the control valve ensures accurate control and full valve authority, independent of the pressure conditions in the system.

To adjust the maximum flow setting:

- 1) disengage actuator by removing actuator from valve or loosening the actuator nut while securing actuator
- 2) turn the hexagon to required flow setting
- 3) remount the actuator

Measurement

The V5007TN10... and V5007TZ10... variant of the valve enables two type measurement using pressure test valves. These measuring ports gets its pressure on the inner orifice, which is only dependent on the presetting of the valve and thus not changing with the differential pressure regulated on the valve. One of the ports (+) is in front of the orifice, one is behind the inner orifice on the outlet of the valve. The measurement available is following:

Flow measurement

For the flow measurement the differential pressure measurement and the k_v -value correspondent to the presetting of the valve is necessary. The valve plug has to be in fully open position (i.e. the actuator has to be fully opened or not installed on the valve). K_v values are dependent on the position of the measurement points and the measurement may be influenced by the actual turbulence and flow conditions. The precision of the measurement may be affected. The differential pressure can be obtained by measurement on the pressure test valves according to the following schematics:

Flow rate can be calculated according to a following formula:

$$Q = k_v \times \sqrt{\Delta p_Q}$$

Formula	Unit	Description
K_v	[l/h]	Coefficient obtained from following table (in accordance with actual presetting of the valve
Δp_Q	[bar]	Measured differential pressure

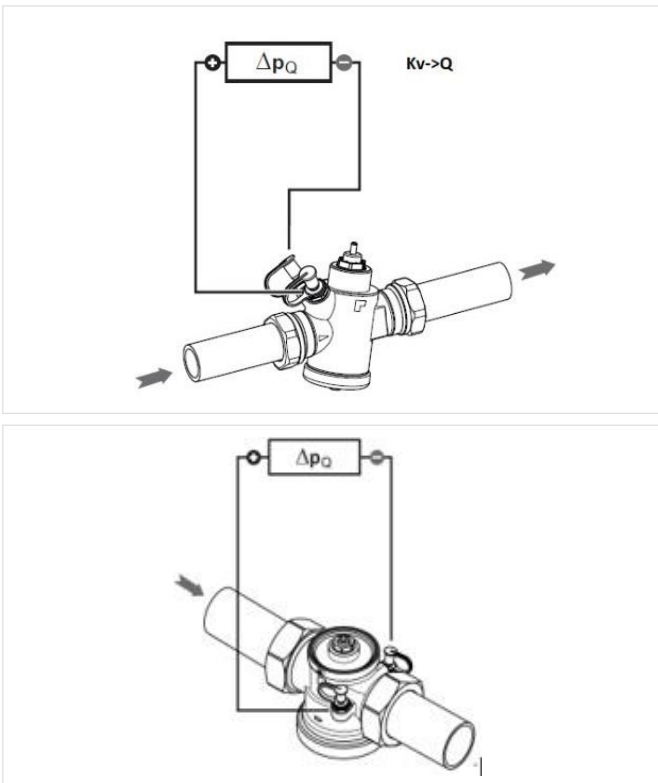



Fig. 1 Flow measurement

Differential pressure measurement

In case the overall differential pressure over the whole valve needs to be obtained, the additional accessory for measurement needs to be used which enables the pressure measurement in front of the valve (Measuring adapter with heat sink – see Item No. in the accessories section). The pressure measurement port on the accessory and  port on the valve (see Fig. 2) should be used for the measurement.

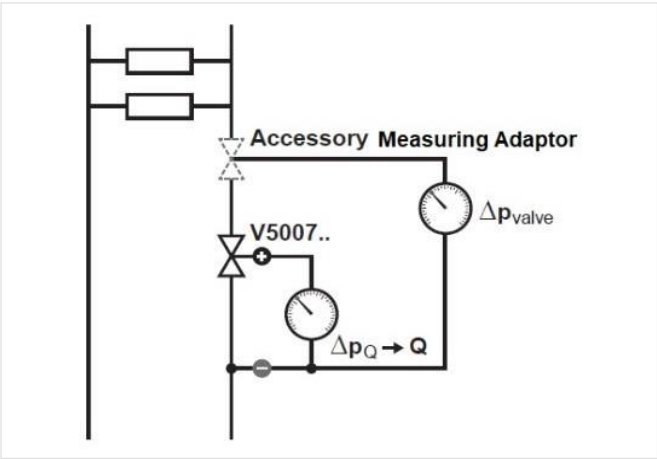


Fig. 2 Differential pressure measurement

Transportation and Storage

Keep parts in their original packaging and unpack them shortly before use.

The following parameters apply during transportation and storage:

Parameter	Value
Environment:	clean, dry and dust free
Min. ambient temperature:	5 °C
Max. ambient temperature:	60 °C
Min. ambient relative humidity:	5 % *
Max. ambient relative humidity:	90 % *

*non condensing

Technical Characteristics

Kv-values for measurement

DN	Flow range																Item No.	
	Min. flow (l/h)	Max. flow (l/h)																
15	10	350	Presetting	10	100	150	200	250	270	300	320	350	max.					V5007TZ10150350
			Kv-value	0.08	0.17	0.26	0.37	0.49	0.55	0.65	0.79	1.03					V5007TN10150350	
	120	1400	Presetting	120	300	400	600	700	800	1000	1200	1300	1400				V5007TZ10151400	
			Kv-value	0.12	0.38	0.52	0.85	1.02	1.21	1.67	2.09	2.60	2.95				V5007TN10151400	
20	80	1000	Presetting	80	300	400	500	600	700	800	900	1000					V5007TZ10201000	
			Kv-value	0.19	0.40	0.56	0.73	0.92	1.17	1.44	1.66	2.04					V5007TN10201000	
	150	2000	Presetting	150	400	600	800	1000	1200	1400	1600	1800	2000				V5007TZ10202000	
			Kv-value	0.21	0.47	0.78	1.13	1.57	2.09	2.56	3.45	4.81	6.03				V5007TN10202000	
25	180	2000	Presetting	180	600	800	1000	1200	1400	1600	1800	2000					V5007TZ10252000	
			Kv-value	0.27	0.87	1.51	2.29	3.27	3.88	4.20	3.60	3.38					V5007TN10252000	
	300	2700	Presetting	300	600	900	1200	1500	1800	2100	2400	2700	max.				V5007TZ10252700	
			Kv-value	0.35	0.73	1.12	1.69	2.24	2.86	3.63	4.38	5.69	7.44				V5007TN10252700	
32	500	4000	Presetting	500	1000	1250	1500	1750	2000	2250	2500	2750	3000	3250	3500	3750	4000	V5007TZ10324000
			Kv-value	1.51	1.88	2.29	2.77	3.3	4.08	4.54	5.25	6.01	6.83	7.71	8.65	9.64	10.7	V5007TN10324000
40	1000	7500	Presetting	1000	1500	2000	2500	3000	3500	4000	4500	5000	5500	6000	6500	7000	7500	V5007TZ10407500
			Kv-value	0.83	2.08	3.36	4.67	6.00	7.37	8.76	10.18	11.63	13.10	14.61	16.14	17.70	19.29	V5007TN10407500
50	2000	12000	Presetting	2000	3000	4000	5000	6000	7000	8000	9000	10000	11000	12000				V5007TZ105012000
			Kv-value	5.16	7.75	10.3	12.9	15.49	18.07	20.66	23.24	25.82	28.4	30.98				V5007TN105012000


Compatible actuators

DN	Stroke (mm)	MT4	MT8	M5410	M4410	MSLM	MSLM	M100	MSHF MSLF	MSHF MSLF	Item No.
		4.0 mm, 90 N, on/off, Thermal	8.0 mm, 90 N, on/off, Thermal	6.5 mm, 90 N on/off	4.0 mm, 100 N, Mod.	0(2)-10V 180 N, Mod. *	0(2)-10V 300 N, Mod.	4.0 mm, 90 N, on/off, Thermal	3-point, 180 N, Flo. *	3-point, 300 N, Flo.	
15	2.9	x	x		x	x		x	x		V5007TZ10150350
15	6.0		x	x		x			x		V5007TZ10151400
15	2.9	x	x		x	x		x	x		V5007TN10150350
15	6.0		x	x		x			x		V5007TN10151400
15	2.9	x	x		x	x		x	x		V5007TZ20150350
15	6.0		x	x		x			x		V5007TZ20151400
15	2.9	x	x		x	x		x	x		V5007TN20150350
15	6.0		x	x		x			x		V5007TN20151400
20	2.9	x	x		x	x		x	x		V5007TZ10201000
20	6.0		x	x		x			x		V5007TZ10202000
20	2.9	x	x		x	x		x	x		V5007TN10201000
20	6.0		x	x		x			x		V5007TN10202000
20	2.9	x	x		x	x		x	x		V5007TZ20201000
20	6.0		x	x		x			x		V5007TZ20202000
20	2.9	x	x		x	x		x	x		V5007TN20201000
20	6.0		x	x		x			x		V5007TN20202000
25	2.9	x	x		x	x		x	x		V5007TZ10252000
25	6.0		x	x		x			x		V5007TZ10252700
25	2.9	x	x		x	x		x	x		V5007TN10252000
25	6.0		x	x		x			x		V5007TN10252700
25	2.9	x	x		x	x		x	x		V5007TZ20252000
25	6.0		x	x		x			x		V5007TZ20252700
25	2.9	x	x		x	x		x	x		V5007TN20252000
25	6.0		x	x		x			x		V5007TN20252700
32	6.0					x			x		V5007TZ10324000
32	6.0					x			x		V5007TN10324000
40	6.0					x			x		V5007TZ10407500
40	6.0					x			x		V5007TN10407500
50	6.0						x			x	V5007TZ105012000
50	6.0						x			x	V5007TN105012000

Note: * Actuators with manual feature operation can be assembled on the valves with 6 mm stroke produced after CW35/2025, valves with 2.9 mm stroke produced after CW45/2025

Dimensions

Overview

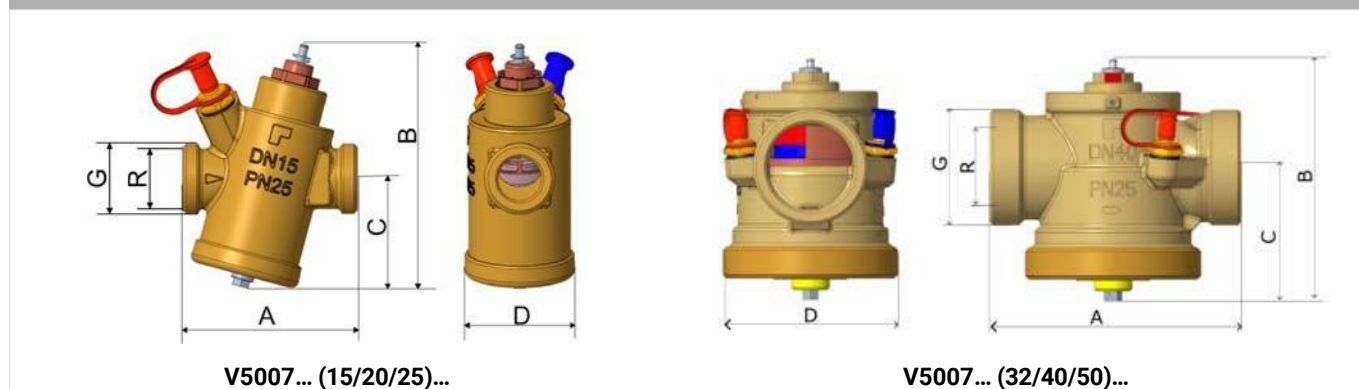

Parameter			Value					
Nominal size diameter:		DN	15	20	25	32	40	50
Dimensions:		A	75	79	83	130	130	158
		B	105	105	105	123	124	136
		C	47	47	47	69	69	72
		D	48	48	48	91	91	99
Thread internal:	V5007TZ.../ V5007TN...	R	Rp 1/2" (NPT1/2)	Rp 3/4" (NPT3/4)	Rp 1" (NPT1)	Rp 1 1/4" (NPT1-1/4)	Rp 1 1/2" (NPT1-1/2)	Rp 2" (NPT2)
Thread external:	V5007TZ... only	G	7/8"	1"	1 1/4"	1 3/4"	2"	2 1/2"

Ordering Information

The following tables contain all the information you need to make an order of an item of your choice.

When ordering, please always state the type, the ordering or the part number.








Options

DN	Differential pressure range		Actuator stroke (closing dimension 11.5) [mm]	Item No. with measuring ports, European threads	Item No. without measuring ports, European threads	Item No. with measuring ports, internal NPT threads	Item No. without measuring ports, internal NPT threads
	$\Delta p_{min.}$ (kPa)	$\Delta p_{max.}$ (kPa)					
15	15	600	2.9	V5007TZ10150350	V5007TZ20150350	V5007TN10150350	V5007TN20150350
15	18		6	V5007TZ10151400	V5007TZ20151400	V5007TN10151400	V5007TN20151400
20	18		2.9	V5007TZ10201000	V5007TZ20201000	V5007TN10201000	V5007TN20201000
20	20		6	V5007TZ10202000	V5007TZ20202000	V5007TN10202000	V5007TN20202000
25	18		2.9	V5007TZ10252000	V5007TZ20252000	V5007TN10252000	V5007TN20252000
25	20		6	V5007TZ10252700	V5007TZ20252700	V5007TN10252700	V5007TN20252700
32	20		6	V5007TZ10324000	-	V5007TN10324000	-
40	20		6	V5007TZ10407500	-	V5007TN10407500	-
50	20		6	V5007TZ105012000	-	V5007TN105012000	-

Note: May vary with presetting of the valve $\pm 10\%$

Note: For list of compatible actuator see the table on page 6

Accessories

	Description		Item No.
	MT4	Actuator: 4.0 mm stroke, 90 N, on/off, thermoelectric	
			MT4-024-NO
			MT4-024-NO-2.5M
			MT4-024S-NO
			MT4-024-NC
			MT4-024-NC-2.5M
			MT4-024S-NC
			MT4-230-NO
			MT4-230-NO-2.5M
			MT4-230S-NO
			MT4-230-NC
			MT4-230-NC-2.5M
			MT4-230S-NC
	MT8	Actuator: 8.0 mm stroke, 90 N, on/off, thermoelectric	
		NO = Normally open	24 V AC/DC
		NC = Normally closed	
		NO = Normally open	230 V AC
	M5410	Actuator: 6.5 mm stroke, 90 N, on/off, fast motorized	
			24 V AC/DC
			230 V AC
	M4410	Actuator: 4.0 mm stroke, 100 N, modulating, thermoelectric 0 - 10 V	
		Note: Closes when power fails	
			M4410E1510
			M4410K1515
			M4410C4000
			M4410C4500
			M4410C4540
			M4410L4000
	MSLM	Actuator: 8 mm stroke, 180 N, modulating 0(2)-10 V	
		Note: For combinations with DN15-DN40 valves * Use only with 6 mm valve stroke	
		Without manual operation feature	24 V AC/DC
		With manual operation feature	
	MSLM	Actuator: 8 mm stroke, 300 N, modulating 0(2)-10 V	
		Note: 300N actuator only for DN50 variant	
		Without manual operation feature	24 V AC/DC
		With manual operation feature	
	MSHF MSLF	Actuator: 8 mm stroke, 180 N, 3-point (floating)	
		Note: For combinations with DN15-DN40 valves * Use only with 6 mm valve stroke	
		Without manual operation feature	24 V AC/DC
		With manual operation feature	
		Without manual operation feature	230 V AC
		With manual operation feature	

	MSHF MSLF	Actuator: 8 mm stroke, 300 N, 3-point (floating) Note: 300 N actuator only for DN50 variant		
		Without manual operation feature	24 V AC/DC	MSLF-B030-150
		With manual operation feature		MSLF-B030-151
		With manual operation feature	230 V AC	MSHF-B030-151
	M100	Actuator: 4.0 mm stroke, 90 N, on/off, thermoelectric		
				M100-BO
				M100-BG
				M100-AO
				M100-AG
				M100-BOX
				M100-BGX
				M100-AOX
	VM242A	BasicMes-2 handheld measuring computer		
		Computer is supplied with case and accessories	for all sizes	VM242A0101
	V2511A	Draining valve		
			DN15 - DN25	V2511A002
			DN32 - DN50	V2511A009
	VS2600	Spare set of 2 pressure test cocks G¹/₄"		
			for all sizes	VS2600C001
	V2511A	Insulation shell		
			DN15 - DN25	V2511A001
			DN32 - DN40	V2511A010
	V2512A	Fittings for external thread		
			DN 15, ⁷ / ₈ "	V2512A78
	VST06A	Connection set Threaded connections		
			DN 20, ³ / ₄ "	VST06-3/4A
			DN 25, 1"	VST06-1A
	V2511A	Measuring adapter		
			DN15	V2511A003
			DN20	V2511A005
			DN25	V2511A007



Manufactured for and on behalf of Pittway Sàrl, Z.A., La Pièce 6, 1180 Rolle, Switzerland	by its affiliate Resideo Kft. Dózsa Gy. Utca 147 8800 Nagkanizsa, Hungary	Subject to change. EN0H-2150GE23 R0525 © 2025 Resideo Technologies, Inc. All rights reserved.
---	---	---

For more information resideo.com	For support resideo.com/emea/en/support
--	---

This document contains proprietary information of Pittway Sàrl and its affiliated companies and is protected by copyright and other international laws. Reproduction or improper use without specific written authorization of Pittway Sàrl is strictly forbidden.

Summary table

DN	Flow range		Stroke	Presetting and Kv values (measured on PT valves)														Item No. (with measurement)	Item No. (without measurement - no PT valves)	Actuator Force (N)	Recommended actuators				
	Min. flow (l/h)	Max. flow (l/h)																			4 mm, 90 N actuators: MT4 , M100 (on/off thermal) M7410A (3-point) M4410 (Mod.)	8 mm, 90/180 N: MT8 (on/off, thermal) M5410 (on/off) M7410 (Mod.)*	8 mm, 180 N: MSLM (Mod.) MSLF (3-point) MSHF (3-point)*	8 mm, 300 N: MSLM (Mod.) MSLF (3-point) MSHF (3-point)	
15	10	350	2.9	Presetting	10	100	150	200	250	270	300	320	350	max.					V5007TZ10150350	V5007TZ20150350	90/180	X	-	X	-
				KV-value	0.08	0.17	0.26	0.37	0.49	0.55	0.65	0.79	1.03					V5007TN10150350	V5007TN20150350						
	120	1400	6	Presetting	120	300	400	600	700	800	1000	1200	1300	1400					V5007TZ10151400	V5007TZ20151400					
				KV-value	0.12	0.38	0.52	0.85	1.02	1.21	1.67	2.09	2.60	2.95					V5007TN10151400	V5007TN20151400					
20	80	1000	2.9	Presetting	80	300	400	500	600	700	800	900	1000					V5007TZ10201000	V5007TZ20201000						
				KV-value	0.19	0.40	0.56	0.73	0.92	1.17	1.44	1.66	2.04					V5007TN10201000	V5007TN20201000						
	150	2000	6	Presetting	150	400	600	800	1000	1200	1400	1600	1800	2000					V5007TZ10202000	V5007TZ20202000					
				KV-value	0.21	0.47	0.78	1.13	1.57	2.09	2.56	3.45	4.81	6.03					V5007TN10202000	V5007TN20202000					
25	180	2000	2.9	Presetting	180	600	800	1000	1200	1400	1600	1800	2000					V5007TZ10252000	V5007TZ20252000						
				KV-value	0.27	0.87	1.51	2.29	3.27	3.88	4.20	3.60	3.38					V5007TN10252000	V5007TN20252000						
	300	2700	6	Presetting	300	600	900	1200	1500	1800	2100	2400	2700	max.					V5007TZ10252700	V5007TZ20252700					
				KV-value	0.35	0.73	1.12	1.69	2.24	2.86	3.63	4.38	5.69	7.44					V5007TN10252700	V5007TN20252700					
32	500	4000	6	Presetting	500	1000	1250	1500	1750	2000	2250	2500	2750	3000	3250	3500	3750	4000	V5007TZ10324000		180	-	-	X	-
				KV-value	1.51	1.88	2.29	2.77	3.3	4.08	4.54	5.25	6.01	6.83	7.71	8.65	9.64	10.7	V5007TN10324000						
40	1000	7500	6	Presetting	1000	1500	2000	2500	3000	3500	4000	4500	5000	5500	6000	6500	7000	7500	V5007TZ10407500		300	-	-	X	-
				KV-value	0.83	2.08	3.36	4.67	6.00	7.37	8.76	10.18	11.63	13.10	14.61	16.14	17.70	19.29	V5007TN10407500						
50	2000	12000	6	Presetting	2000	3000	4000	5000	6000	7000	8000	9000	10000	11000	12000				V5007TZ105012000		300	-	-	-	X
				KV-value	5.16	7.75	10.3	12.9	15.49	18.07	20.66	23.24	25.82	28.4	30.98				V5007TN105012000						

* Actuators with manual feature operation can be assembled on the valves with 6 mm stroke produced after CW35/2025, valves with 2.9 mm stroke produced after CW45/2025