

ST-1200BR

ST SYSTEM FOR PASTURES, CORRALS, ARENAS, DUST CONTROL, AND WASH-DOWN WATERING


Radius: **20.4 to 35.1 m**
 Flow: **6.13 to 29.76 m³/hr; 102.1 to 495.9 l/min**
 Inlet: **1½" (40 mm) BSP**

FEATURES

- Nozzle choices: 5 (included)
- Standard nozzle: #12
- Nozzle range: #10 to #18
- Nozzle trajectory: 22.5°
- Gear-drive: Isolated, grease lubricated gear-drive
- Nozzle barrels: short and long (included)
- Arc adjustment: Moveable stops (left and right) arc adjustment
- Arc setting: 40° to non-reversing 360°
- Ratcheting nozzle turret

OPERATING SPECIFICATIONS

- Radius: 20.4 m to 35.1 m
- Flow: 6.13 to 29.76 m³/hr; 102.1 to 495.9 l/min
- Recommended pressure range: 2.0 to 6.0 bar; 200 to 600 kPa

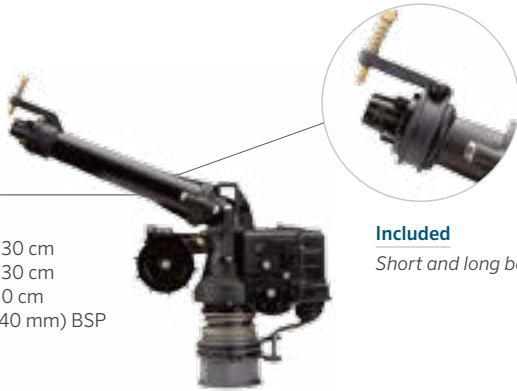

ST-1200BR
 Overall height: 30 cm
 Overall length: 30 cm
 Overall width: 10 cm
 Inlet size: 1½" (40 mm) BSP

Included
 Short and long barrels

ST-1200BR NOZZLE PERFORMANCE DATA

Nozzle	Pressure		Radius m	Flow		Precip in/hr	
	Bar	kPa		m ³ /hr	l/min	■	▲
10 ●	2.0	200	20.4	6.13	102.2	29.4	34.0
	3.0	300	22.9	7.45	124.2	28.5	32.9
	4.0	400	25.9	8.65	144.2	25.8	29.8
	5.0	500	27.4	9.88	164.7	26.3	30.3
12 ●	2.0	200	20.7	7.63	127.2	35.5	41.0
	3.0	300	23.8	9.36	156.0	33.1	38.2
	4.0	400	26.8	10.81	180.2	30.1	34.7
	5.0	500	29.9	12.06	201.0	27.0	31.2
14 ●	2.0	200	21.3	10.38	173.0	45.6	52.7
	3.0	300	26.2	12.72	212.0	37.0	42.8
	4.0	400	30.5	14.70	244.9	31.6	36.5
	5.0	500	33.5	16.47	274.4	29.3	33.8
16 ●	2.0	200	21.9	13.52	225.2	56.1	64.8
	3.0	300	28.3	16.58	276.3	41.3	47.7
	4.0	400	31.4	19.15	319.1	38.9	44.9
	5.0	500	35.4	18.38	306.2	29.4	33.9
18 ●	3.0	300	29.0	21.01	350.1	50.1	57.9
	4.0	400	31.7	24.31	405.0	48.4	55.9
	5.0	500	33.8	27.15	452.4	47.4	54.8
	6.0	600	35.1	29.76	495.9	48.4	55.9